MICRO2 FUSE BLOCKS LATERAL CONNECTION

Bussmann

Part Number	No. Poles	Max Amps / Block	Block Dimensions
FB4-ATR	4 Pole	30A	83(L) x 45(W) x 38.5(H)
FB6-ATR	6 Pole	45A	103(L) x 45(W) x 38.5(H)
FB8-ATR	8 Pole	60A	123(L) x 45(W) x 38.5(H)
FB10-ATR	10 Pole	90A	143(L) x 45(W) x 38.5(H)

NEW


IPX4



FB4-ATR

Voltage: 32V
Circuit Rating: 15A max per circuit
Cover: Clear with o-ring seal
Block: Moisture resistant back plate
IP Rating: IPx4 (Splash proof)
Terminals: Lateral 1/4" QC (6.25mm).
Mounting: Surface mount, M5 screw.
Pack Size: 1, 5, 50.
Notes: Fuses not included. RoHS

Mounting Diagram



Fixing Centers
4 Pole - 65.5mm
6 Pole - 85.5mm
8 Pole - 105.5mm
10 Pole - 125.5mm



FB6-ATR



RELATED PRODUCTS: **Micro2 Fuses** (see p.13)

MINI FUSE BLOCK AXIAL CONNECTION

MTA

Features:
- Up to 7 x Mini fuse protected circuits & space to store 3 x spare fuses.
- Compact design for mounting in tight spaces using cable ties.
- Kit includes plenty of terminals in 3 different sizes to suit a wide range of cable sizes.
- Hinged cover protects fuses from the elements. Inside legend identifies the circuits.




Use cable ties through side slots to secure fuse holder to vehicle.


Part Number	Kit Description
01435K	Mini Fuse Block Kit Includes; 1 x 01430 7 Way Frame 7 x 01420 Mini Fuse Housings 16 x 08330BK Terminals (0.35 - 0.75mm²) 16 x 08331BK Terminals (1.0 - 2.0 mm²) 16 x 08332BK Terminals (2.5 to 4.0mm²)

Voltage: 32V
Body: Black rubber (PA 66 GF30)
Terminals: Tin plated copper. BK = Bulk Pack.
Pack Size: 1, 250, 400
Notes: Cable ties and fuses not included.
Approvals: RoHS


Storage for 3 spare fuses.

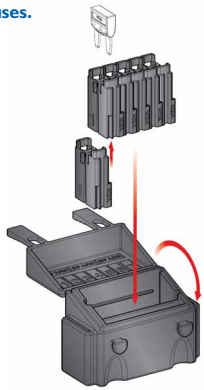


Fuse Housing



Fuse Frame






Dimensions in MM

RELATED PRODUCTS:



Mini Fuses (see p.15)

Female Terminal



PROLEC
Email: info@prolecproducts.com.au
Web: www.prolecproducts.com.au