
INSULATED HEAT SHRINK BUTT SPLICE CONNECTORS

Insulated splices provide a rugged, environmentally sealed connection for wire sizes that will insulate, seal and protect joints from physical abuse and abrasion, water, salt and other corrosive compounds.

Part Number	Wire Gauge	Wire Section	A (mm)	B (mm)	C (mm)	Colour
1880230	22-18AWG	0.75-1.25mm²	15	37.0	4.2	Red
1880240	16-14AWG	1.25-2.50mm²	15	37.0	4.9	Blue
1880250	12-10AWG	2.50-6.00mm²	15	41.0	6.4	Yellow



Voltage: Maximum 600V
Barrel Type: Closed.
Material: Tin-plated (Sn) Copper (Cu), with polyethylene (PE) insulation.
Material Thickness: 0.8mm
Temperature Range Operating: -55°C to +125°C
Wire Insulation Diameter: 5.97mm max.
Pack Size: 10, 50, 100, 500



1 Insert both cables & crimp

2 Apply heat to seal



MALE & FEMALE PVC INSULATED DISCONNECTS

NEW


Part Number	Nylon Insulated	Wire Section	L1 (mm)	L2 (mm)	Dia	Colour
1852000	1/4" Male Push On	0.25-1.00mm²	12	21.0	1	Red
1856000	1/4" Male Push On	1.00-2.50mm²	12	21.0	2	Blue
1862000	1/4" Male Push On	2.50-6.00mm²	13	22.5	3	Yellow
1851500	1/4" Female Push On	0.25-1.00mm²	-	23.5	4	Red
1855500	1/4" Female Push On	1.00-2.50mm²	-	23.5	5	Blue
1860500	1/4" Female Push On	2.50-6.00mm²	-	24.0	6	Yellow

RELATED PRODUCTS:





Crimping Tools
(see p.184)

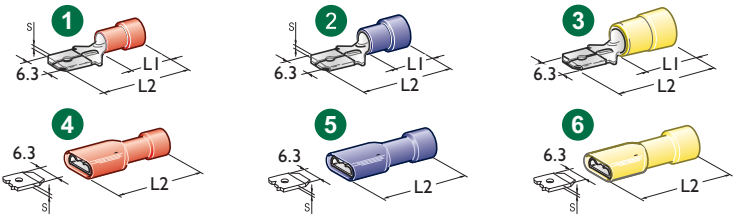

TUBULAR TERMINAL CRIMPING TOOL

NEW

Seemless copper tube ring terminals. Material : Cu-Sn


Part Number	Screw Hole	Wire Section	Dia.
05000BK	M6	16mm²	1
05100BK	M8	16mm²	1
05010BK	M8	25mm²	2
05021BK	M8	35mm²	2
05110BK	M10	25mm²	3
05020BK	M10	35mm²	3
05030BK	M11	50mm²	4
05040BK	M13	75mm²	5



RELATED PRODUCT:



Crimping Tool
(see p.184)

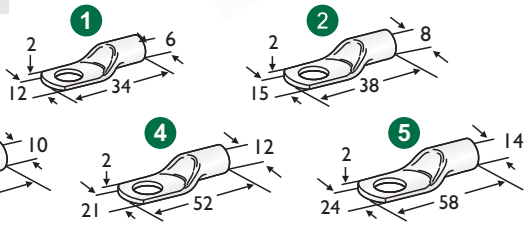

Email: info@prolecproducts.com.au
Web: www.prolecproducts.com.au