
POWERVAL CALIBRE FUSE 32V


MTA



- Designed for high current circuit protection to protect starter cables.
- Ideal for starter and alternator connectors.
- These fuses allow the load of a starter motor or winch to operate without blowing the fuse, however they will open in the case of a direct short.

Part Number	Continuous Rated Current	Min. Melting Current	Max. Melting Current	Cable Size (mm^2)	Body Colour
POWCAL1	150A	380A	2000A	16	Grey
POWCAL2	150A	400A	2000A	25	Black
POWCAL3	180A	530A	2000A	50	Red
POWCAL4	180A	600A	2000A	50	Brown
POWCAL5	180A	700A	2000A	50	Wheat

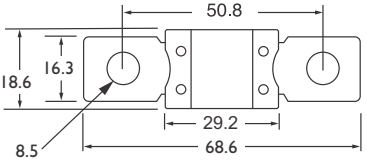



Dimensions in MM

Voltage: 32VDC **I.R.:** 2000A at 32VDC
Characteristic: Slow Acting
Mounting: M8 or 5/16" studs
Terminal: (POWCAL1 - 2) Tin Plated Zinc Alloy.
(POWCAL3 - 5) Tin plated Copper.
Pack Size: 1, 10, 100
Approvals: REACH RoHS

RELATED PRODUCTS:



Inline Fuse Holder
(see p.82)



Fuse Block
(see p.96-101)



Fused PDU
(see p.111-115)

Scan this QR Code for more information

QR Code: 3004

FUSE STRIP WITH HOUSING 48V - 80V


PROLEC


Part Number	Ampere Rating	
FBT030	30A	NEW
FBT035	35A	
FBT040	40A	
FBT050	50A	
FBT060	60A	
FBT080	80A	
FBT100	100A	
FBT125	125A	
FBT130	130A	
FBT150	150A	
FBT175	175A	
FBT200	200A	
FBT225	225A	

Part Number	Ampere Rating	
FBT250	250A	
FBT275	275A	
FBT300	300A	
FBT325	325A	
FBT350	350A	NEW
FBT355	355A	
FBT400	400A	
FBT425	425A	
FBT500	500A	
FBT600	600A	
FBT675	675A	
FBT750	750A	
FBT800	800A	



Straight Fork and 90 Degree Type Lugs

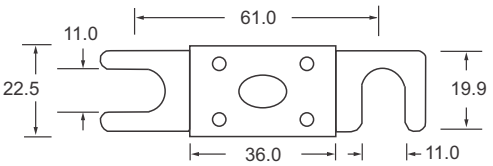



Dimensions in MM

Voltage: 48VDC (30A-425A), 80VDC (500A-800A)
I.R.: 2.5kA at 48VDC, 3kA at 80VDC.
Characteristic: Fast Acting
Mounting: M10 or 3/8" studs.
Feature: Element window.
Pack Size: 1, 10, 20, 50
Approvals: DIN 43560, IEC60269-4, TUV
UL 248 RoHS

RELATED PRODUCT:



Fuse Block & Cover
(see p.101)

PROLEC

Email: info@prolecproducts.com.au
Web: www.prolecproducts.com.au