SPLASH PROOF CIRCUIT BREAKER KIT

Features:
- Includes Single Pole, Manual Reset (Type III) thermal circuit breaker.
- Includes Clear Cover for IP64 water resistance.
- Includes Terminal Boot to protect terminals from accidental shorts.
- Circuit breaker has parallel mounting bracket.
- Circuit breaker hardware.

NEW
IGNITION PROTECTED
IP66*

Part Number	Ampere Rating
CB3K-10	10A
CB3K-15	15A
CB3K-20	20A
CB3K-25	25A
CB3K-30	30A
CB3K-40	40A
CB3K-50	50A



Retail Ready Blister Pack



Terminal Boot


Clear Cover


Manual Reset Circuit Breaker

Push button to reset


Voltage: 12-24VDC (Type III, manual reset).
I.R.: 2.5kA @ 12VDC.
Operating Temp: -10°C to 60°C
Body Type: Plastic case.
Features: Ignition Protected
Ingress Protection Rating: IP66 (excludes terminations).
Reset Overload Capacity: 6 x rated current.
Pack Size: 1pc.
Mounting Hole: Bracket mounting holes 5.8 mm diameter.
Notes: Keps lock nuts included with circuit breakers.
Approvals: SAE J553, J1171 RoHS
Notes: When covers fitted, complies with ABYC E-9, USCG 33pl & ISO 10133. Terminal boot cable entry suits 18-10AWG cable.




Clear Cover Fitted



Boot Fitted

Parallel Bracket






Dimensions in MM



Terminal Specs
2 x #10-32 studs

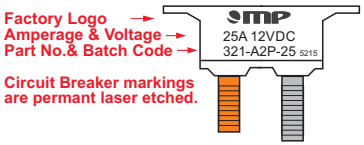

Circuit Breaker markings are permant laser etched.

Connect the short stud to battery (+), connect the long stud to auxiliary circuit(s).