MIDI FUSE DISTRIBUTION BLOCK 2-3 POLE

Littelfuse

Features:
Suited for near-the-battery applications and can be mounted in exposed locations.
Single input power cable connects to a 3 pole internal busbar to feed 2 or 3 fused output cables.
Eliminates splices & multiple fuse holders. 2 spare Midi fuses can be fitted to the inside of the cover.
Water-proof and dust-proof fuse holder. Very high IP rating IP69K.
Developed for high current loads, and harsh conditions.

NEW
IGNITION PROTECTED
IP69K

Part Number	Fuse Block Description
04980933	3 Pole Midi Fuse Module Kit



Module Kit
04980933

04980933 Module Kit Contents
1 x Base with tethered cover & seal.
1 x Busbar powers up to 3 fuses from a single input cable.
6 x Nuts to secure up to 3 Midi fuses.
6 x Cable seals of assorted sizes.
1 x Cavity plug, required if you only install 2 x Midi fuses.
2 x Cable seal caps to secure cable seals into unit.
4 x Screws to secure 2 spare fuses to inside cover.
1 x Instruction sheet.
Module kit does not include ring terminals or fuses.



Voltage: 58VDC max. **Rating:** Maximum total current 200A.
Wire Size: 16 or 25mm^2 (input cable), 6 to 16mm^2 (output cables).
Temperature Rating: -40°C to +85°C. **Body & Cover:** UL 94-V0.
Ingress Protection Rating: IP67, IP69K when cover, cable seals & caps are installed. Cables must not exceed the minimum bend radius advised in the included instruction sheet to ensure seal integrity.
Cavity Plug: Included cavity plug must be fitted if using only 2 x Midi fuses.
Mounting: Surface mount using 3 fixing holes (M6 or 1/4").




3 fused outputs

RELATED PRODUCTS:


Midi fuses 32V 

Midi fuses 58V 

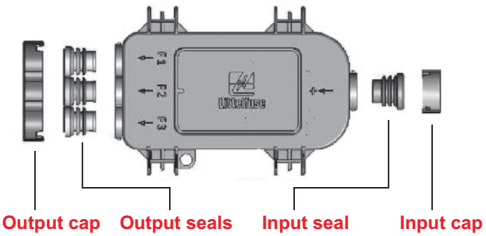




Cable seals keep your fusing protected from dust, moisture, and debris.



AssureLatch™ ensures an excellent seal and convenient closure system.

Dimensions in MM

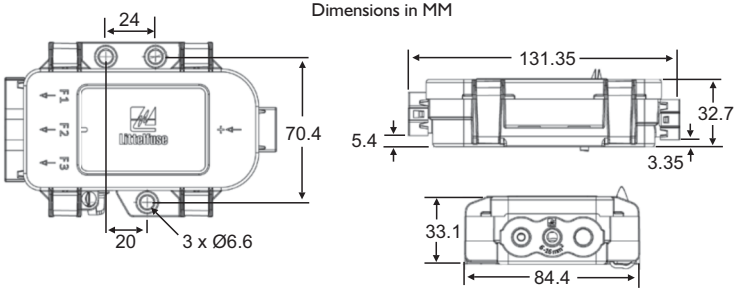

PROLEC

Email: info@prolecproducts.com.au
Web: www.prolecproducts.com.au