
CLASS T, EV & EVSE BOLTED FUSE BLOCKS MODULAR

Littelfuse

NEW

Features

- Modular design reduces inventory requirements.
- Supplied with nut and belleville washer.
- 200kA short-circuit withstand rating.



Part Number	Ampere Rating	Terminal Stud Size (Metric)	Suggested Stud Torque
LSCR101	400A	1/4"-20 (6.35mm)	7.6-9.3 Nm
LSCR102	800A	3/8"-16 (9.52mm)	23.4-28.6 Nm
LSCR103	1200A	1/2"-13 (12.7mm)	30.5-37.3 Nm

Voltage: 1000VAC / 1000VDC
Insulator Material: Thermoplastic (125°C Max)
Terminal Material: Steel, Zinc Plated.
Ordering Information: Sold as single blocks. (order 2 blocks per fuse).
Notes: Fuse not included.
Approvals: c UL us RoHS



LSCR101



LSCR102



LSCR103

Swe-Check
Email: sales@swe-check.com.au
Web: www.swe-check.com.au

FUSE COMPATIBILITY REFERENCE

Fuse Series	Amp Range	LSCR101	LSCR102	LSCR103
250GG	75A - 150A	X		
250GG	160A - 200A		X	
4-GG	630A - 800A			X
4-NB	630A - 1200A			X
4-SB	630A - 1200A			X
AE5	50A - 400A	X		
AE5	400A - 800A		X	
AE7	60A - 150A	X		
AE7	175A - 800A		X	
AEX	70A - 100A	X		
AEX	125A - 800A		X	
ANL	35A - 400A	X		
ANN	10A - 400A	X		
DFJ	70A - 200A	X		
DFJ	225A - 400A		X	
DFJ	450A - 600A			X
EET	75A - 160A	X		
EF3	100A - 400A	X		
EFT	100A - 400A	X		
ET	15A - 80A	X		
EV20	50A - 150A	X		
EV25	100A - 250A	X		
EV30	200A - 400A	X		
FBT	35A - 500A		X	
FE	35A - 100A	X		
FEE	100A - 200A	X		
FM	180A - 350A		X	
FMM	400A - 700A		X	
FWA	70A - 400A	X		
FWA	500A - 800A		X	
FWH	35A - 200A	X		
FWH	225A - 600A		X	
FWH	700A - 1200A			X
FWJ	35A - 100A	X		
FWJ	125A - 400A		X	
FWJ	500A - 1200A			X
FWP	5A - 100A	X		
FWP	125A - 400A		X	
FWP	450A - 800A			X
FWX	35A - 200A	X		
FWX	225A - 800A		X	
JJN	70A - 200A	X		
JJN	225A - 600A		X	
JJN	700A - 1200A			X
JJS	70A - 200A	X		
JJS	225A - 600A		X	
JJS	700A - 800A			X
JKS	70A - 200A	X		
JKS	225A - 400A		X	
JKS	450A - 600A			X

Continued on next page.

Not all recommended holders may be suitable for your circuit. Please check the holder specifications are suitable for your fuse.


FUSE COMPATIBILITY REFERENCE

Continued from previous page.


Fuse Series	Amp Range	LSCR101	LSCR102	LSCR103
KRPC	601A - 1200A			X
LET	10A - 160A	X		
LETa	180A	X		
LMMT	400A - 800A		X	
LMT	160A - 450A		X	
LPJ..SP	70A - 200A	X		
LPJ..SP	225A - 400A		X	
LPJ..SP	450A - 600A			X
MMT	180A - 710A		X	
MT	160A - 355A		X	
PV-...ANH1-B	63A - 200A	X		
PV-...ANH2-B	160A - 250A		X	
PV-...ANH3-B	315A - 400A		X	
TPL/LI7T	70A - 250A	X		
TPL/LI7T	300A - 800A		X	

Not all recommended holders may be suitable for your circuit. Please check the holder specifications are suitable for your fuse.


Swe-Check
Email: sales@swe-check.com.au
Web: www.swe-check.com.au

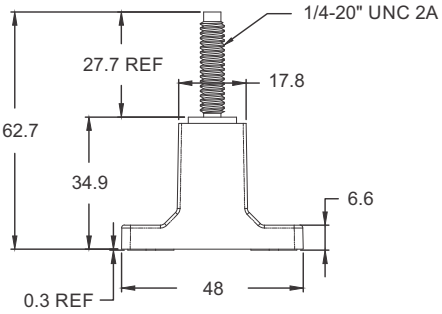



LSCR101

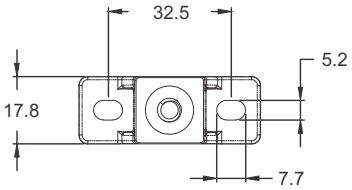


Dimensions in





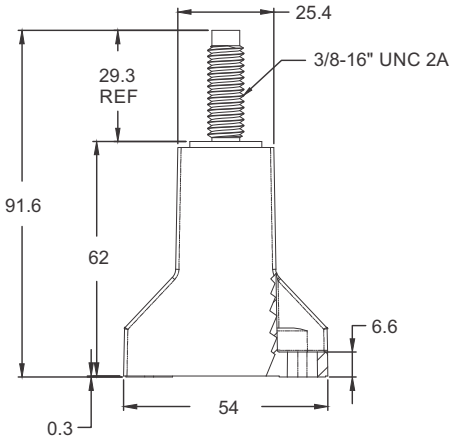

LSCR102

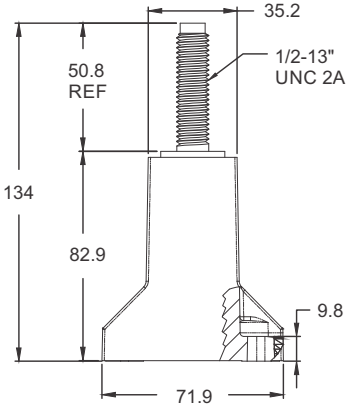

LSCR103

Swe-Check
Email: sales@swe-check.com.au
Web: www.swe-check.com.au