
MEGA FUSE HIGH POWER DISTRIBUTION MODULE 2 POLE

The 2 Pole High Power Distribution Module provides two high current Mega fuse protected circuit outputs, as well as an un-fused output that can optionally be used to parallel multiple modules or deliver power to circuits which do not require circuit protection or to daisy chain multiple devices.

NEW
70V
IP67
IP69K

Part Number	Description	Cover Label
0301887	2 Pole with Cover 32V	■
0300419	2 Pole with Cover 70V	■

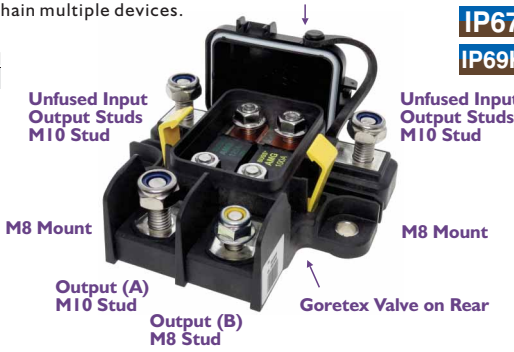

Voltage: Varies see above.
Max Input Current: 600A
Max Fuse Rating Per Circuit: 250A
Ingress Protection Rating: IP67, IP69K
Stud Terminals: Copper Tin Plated.
Dimensions: 129 x 125 x 45mm
Cover Label: 32V (White), 70V (Blue)
Notes: Mega fuses not included.
Either side can be input or un-fused outputs.
Un-fused output. (eg. starter). Two fused outputs.

RELATED PRODUCTS:



Mega Fuse 32V &70V
(See p.25)



Tubular Terminals
M8 & M10 (See

Circuit Diagram



Scan this QR Code for more information

QR Code: 9022

MEGA FUSE DISTRIBUTION BLOCKS 5 POLE

Bussmann


Heavy duty power distribution module for main branch primary fusing.
Common busbar requires just one input connection to power all the fuses.

Part Number	Description	A	B
LMG3-1-001	3 Pole fuse block with cover	50	50
LMG5-1-001	5 Pole fuse block with cover	100	50 or 100*


Rating: Maximum total combined rating is 300A continuous.
Maximum ampere rating based on fuses, input & output wiring.
Body: Black UL-Rated 94 V0 thermoplastic.
Busbar: Plated copper.
Studs: 5/16"-18 plated steel (E), optional M8 metric studs(M).
Hardware: Includes busbar, nuts & lock washers.
Cover: Flexible protective red EPDM cover.
Temperature:-40°C to 85°C. **Notes:** Fuses are not included.




LMG5-1-001

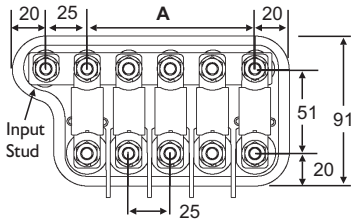


Dimensions in MM





* 5 pole block has 3 input stud holes to provide 50 or 100mm spacing between the 2 studs.

Circuit Diagram



RELATED PRODUCTS:
Mega Fuses (see p.25)

